



**User's Guide  
for  
GT WATCH  
Smartee-1**

This watch supports GSM, not CDMA.

## Dear Sir/Madam :

---

We thank you for purchasing a GT Watch Smartee-1, the main functions are listed as below:

**Emergency help:** A child can call for help by pressing the SOS button when he/she is in danger.

**Positioning:** Parents can keep track your child's location anytime.

**Remote monitoring:** Parents can check and listen to the surrounding sound where the child is located.

**Remote alarm:** Alarm clock can be set to remind children to do things and help them to form good habit.

**Safety alert:** Alerts can be set up to remind parents when the child enters or leaves a prohibited area, which is deemed unsafe for children.

**Dual channel:** Possibility of giving and receiving phone calls to/from the watch.

In order to understand all the features of this watch, please read the following instructions carefully and follow the instructions in this user guide.

## Safety Warning

---

- Use only the original accessories recommended by the manufacturer. Different models may result in suboptimal performance, malfunction and eventual breakdown, making all relevant functions invalid.
- Do not attempt to repair the watch by yourself, as the modification to the watch will affect the safety of the product and void the warranty.
- Avoid any contact with corrosive cleaners, detergents and other chemicals, and use a soft, dry cloth to clean the watch.
- It is prohibited to use the watch at gas stations, restricted chemical plants or near oil deposits, as the use of the watch in the above environment may result in the risk of fire hazard or explosion.
- When you are about to board a plane, place the watch in the luggage, and try not to put it in the handbag while going through the checkpoint, as the manufacturer is not responsible for the damage caused by such radiation.

## Instructions on batteries & handling batteries

- Batteries are not allowed to be thrown into garbage can. As a consumer, you are required to handle and dispose the used batteries properly.
- Note that the battery anode and cathode, if not used properly, may cause damage to the device.
- It is prohibited to try to disseminate the batteries or throw batteries into fire.
- The liquid flowing from the batteries is very dangerous; do not touch it unless you are wearing protective gloves.
- Never place the battery in the hands of children.
- Remove the battery from the device if you are not going to use it for a long time.

## Product Features

---



**Speaker/MIC:** Do not cover the speaker during a call.

**Charging port:** Connect the watch to power source in order to charge it.

**Reset button:** Pressing the pinhole with fine needle in case of a dead-halt to reset the watch.

**SOS dial/answer:** Press the button for three seconds to dial out an emergency number while in danger or needing help. And press it one time the button to answer the incoming call and hang up under the condition of normal conversation.

**Tips:** The watch will not shutdown unless the battery is removed.

## Operating Instruction

---

**Plug-in SIM card:** Open the back cover of the watch and place the SIM card into the slot as per the directions showed. Find the golden contact point and place the battery into the slot. Lastly, put on the back cover and fasten it with screws.

**Power on:** Press the SOS button for three seconds to start up the watch (The mobile phone will not read its IMEI/SN unless the watch has been turned on).


**Install the app:** Please install GT Watch app on your mobile phone before using the watch.

- Scan QR code on the bottom of packing box with your mobile phone to download the watch App; or open GT Mobile's website "[www.gtmobile.sg/gtwatch](http://www.gtmobile.sg/gtwatch)" to download the watch App. IOS users can also go to Apple App Store, and search for "GT Watch" to download our app.
- After installation, please create a new account and enter basic information when prompted.

## Add Devices

---

Choose "Device" function, then click on  on top right of the interface or swipe to left on the screen to enter the interface control, and then click on "Add" on the top right of the screen, scan the bar-code or enter the device number to add the device (the bar-code is on the bottom of the packing box, while the device number is the number under the bar-code).

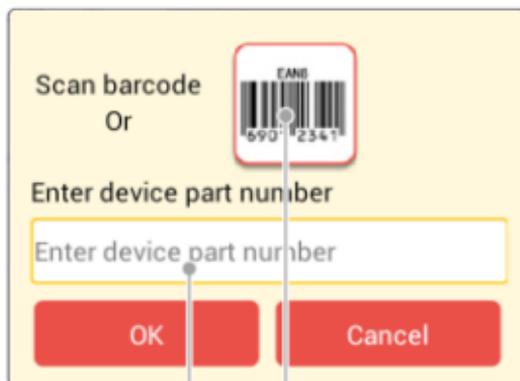

Scan barcode  
Or

Enter device part number

Enter device part number


OK Cancel

Click here to scan bar code

Click here to enter device part number

## Manage Devices

Press and hold a device's icon on the interface control to delete the device. Click on device number to enter modify interface. Basic information, including emergency numbers, monitor numbers, friends' numbers, alarm clock, and the device password can be modified here.

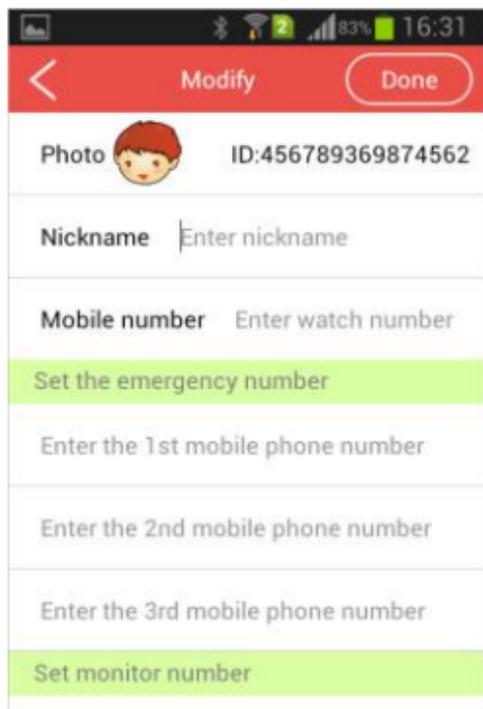

	Modify	Done
Photo		ID:456789369874562
Nickname	Enter nickname	
Mobile number	Enter watch number	
Set the emergency number		
	Enter the 1st mobile phone number	
	Enter the 2nd mobile phone number	
	Enter the 3rd mobile phone number	
Set monitor number		

**Emergency numbers:** **three emergency numbers** can be set so that the child can call for help by pressing the SOS button for three seconds in case of emergency, and **the watch will dial those three numbers continuously until the call is answered from either one of the contacts.**

**Monitor numbers:** **two monitor numbers** can be set by which commands can be given from the phone to monitor the surrounding sound around the child.

**Friend numbers:** **five numbers of friends** can be pre-set to which the child can call – list of friends' numbers will be displayed by pressing and releasing the SOS button on Home. And press it again to select one number from the list, and press and hold the SOS button to dial out after selection.

**Safety alert:** Set safety alert for the watch from the mobile phone device, and alarm will be triggered on the phone when the child enters or leaves restricted or prohibited areas.

## Call

---

The watch is designed for children, thus through the watch, only the emergency numbers, friends' numbers and monitor numbers that you have set previously can be connected for calling to/from the watch. No other numbers can get connected with the watch.


- The child can only call to the emergency numbers and friend numbers that you have set;
- When there is any call from emergency numbers or friends' numbers, the calling interface will display on the watch, and the child can press the SOS button to answer the call;
- The calling interface will not be displayed on the watch when there is any call from monitor numbers, and the watch will answer the call automatically. Pressing the SOS button will not disconnect the call.

### Tips:

The option of displaying caller ID must be opened up for the phone card inserted in the watch.

## Devices

You will enter the Device list by default after logging into the App, and click on a specific device to show the map. On the map, you can locate, call, track and set safety fences for your child.

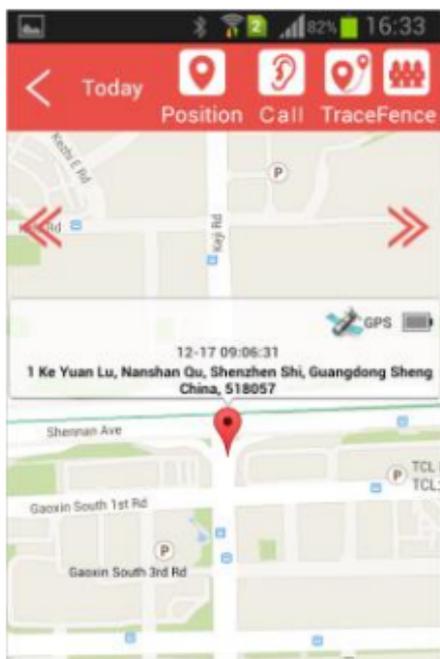

GPS indicates satellite positioning; LBS+ indicates cellular and WIFI positioning.

**Positioning:** Usually, the watch will operate under normal work mode and report the current location at a specific interval. When the watch is required to operate under high-frequency positioning mode, please click on the "position" button, and the watch will start positioning and report the current location at a high frequency. Click on "◀" or "▶" to check historical tracks.

**Monitor:** Monitor the surrounding sound around the child, and click on "Call" on the map to begin monitoring.

**Trace:** Select the date to check the historical tracks.

**Area:** Set a safety/prohibited area for the child, and once the child enters or leaves the area, the watch will sound an alarm to warn the child and send Push Notifications to the phone.

- Click on "Add" after clicking on "Fence" and enter "Fence Name" and select "Fence Type", and then drag the map to make the blue circle cover where you want to set a fence. This means that the region within a 2km radius from the center will be the preset fence area, and click on "Done" on the top right of the screen to complete the setup.
- If you have set several fences, the fences will be shown on the electronic fence list interface. Change the fence area by clicking on a certain fence; to delete a fence, press and hold it.

## Notification

---

This function is designed for you to view the monitoring logs on the phone. Click on “  ” of the Device interface or swipe to right on the screen and click on “Notification” to view the logs. Once the child enters or leaves the fence, receives a message, or dials emergency number, you will receive a notification message on your phone.

## Settings

---

Edit the basic information on the phone. For example: Photo, Name, Notification Setup & Notification Type and selection of map, etc.

## About

---

View the version information of the App software.



Scan QR code to download App

**This product will be continuously updated. The actual content might be different from the information in this User's Guide, which are subject to change without prior notice. The illustrations in the User's Guide are for your reference only.**

**GT Mobile reserves the right of eventual updates of the User's Guide.**